

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
3 April 2003 (03.04.2003)

PCT

(10) International Publication Number
WO 03/028056 A1

BEST AVAILABLE COPY

(51) International Patent Classification⁷: **H01H 9/56**

(74) Agent: **JORRITSMA, Ruurd**; Nederlandsch Octrooibureau, Scheveningseweg 82, P.O. Box 29720, NL-2502 LS The Hague (NL).

(21) International Application Number: **PCT/NL02/00588**

(22) International Filing Date:
13 September 2002 (13.09.2002)

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:
1018960 14 September 2001 (14.09.2001) NL

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **HOLEC HOLLAND N.V.** [NL/NL]; P.O. Box 23, NL-7550 AA Hengelo (NL).

(72) Inventor; and

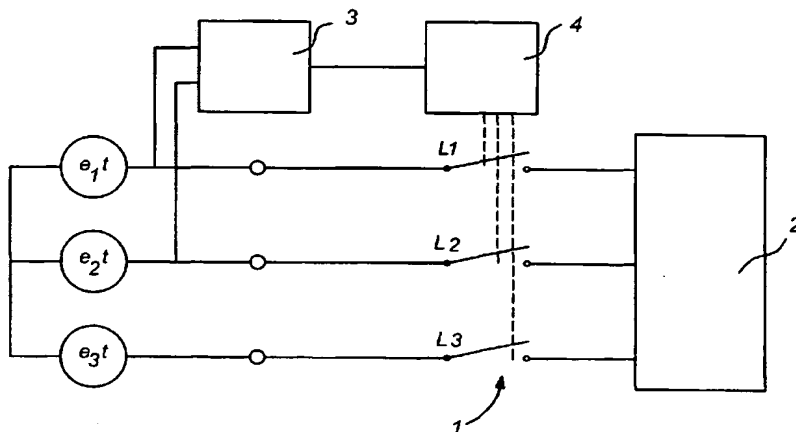
(75) Inventor/Applicant (*for US only*): **SCHOONENBERG, Gerard, Cornelis** [NL/NL]; Kretastraat 12, NL-7559 CR Hengelo (NL).

Published:

— with international search report

[Continued on next page]

(54) Title: **THREE PHASE SYSTEM WITH CONTROLLED SWITCHING OF A LOAD NETWORK TO A THREE PHASE POWER SUPPLY**



(57) Abstract: Three-phase system comprising a three-phase power source and a three-pole switch, through which the phase terminals of the three-phase power source can be connected to a load network. A reference time detector is present for determining a reference point in time. A drive control circuit is provided for controlling the poles of the switch. The poles of the three-pole switch are switched at controlled times at different intervals with respect to the reference time. The time of the contact touch of the first pole is after 185° plus the maximum anticipated pre-ignition time increased by n times 180° after the zero crossing of the voltage between the first and second pole. The times of contact touch of the second pole and the third pole are respectively at n_1 times the frequency period increased by 120° and increased by n times 180° and at n_2 times the frequency period increased by 240° and increased by n times 180° after the time of contact touch of the first pole, where n is equal to zero or a whole number.

WO 03/028056 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

THIS PAGE BLANK (USPTO)

THREE PHASE SYSTEM WITH CONTROLLED SWITCHING OF A LOAD NETWORK TO A THREE PHASE
POWER SUPPLY

5 The invention relates to a three-phase system comprising a three-phase power source, a three-pole switch, through which the phase terminals of the three-phase power source can be connected to a load network, a reference time detector for determining a reference point in time, and a drive control circuit for driving the poles of the switch such that the poles of the three-pole switch are switched at controlled times at different intervals with respect to the reference time.

10 A device of this kind is known from laid-open German patent application DE-A-4 105 698. This known three-phase system comprises a load network that is switched onto a three-phase power source by means of a three-pole switch, the poles being switched at individual times. This extends the electrical and mechanical lifetime of the switches for all types of load and current.

15 It is an object of the invention to provide a three-phase system of the type mentioned in the preamble, in which the switching, even if a short-circuit exists, limits the (arc) energy generated also during the pre-ignition stage and any bounce of the contacts of the switch poles.

20 This object is achieved by the invention by arranging that the time of contact touch of the first pole is between 185° and 257° increased by n times 180° after the zero crossing of the voltage between the first and second pole, and that the times of contact touch of the second pole and the third pole are respectively at n_1 times the frequency period increased by 120° and increased by n times 180° , and at n_2 times the frequency period increased by 240° and increased by n times 180° after the time of
25 contact touch of the first pole, where n , n_1 and n_2 are zero or a whole number.

Preferably, the time of contact touch of the first pole is at $2 \text{ ms} + 185^\circ$ increased by n times 180° after the zero crossing of the voltage between the first and second pole.

Owing to the choices of times of contact touch of the poles of the switch mentioned above, the (arc) energy generated, even when all possible types of short-circuit exist, is limited. Moreover, the invention prevents the main contacts from
30 becoming welded together. The risk of re-ignition at the next disconnection is reduced.

In addition, the invention has the following advantages:

- less wear, therefore can be switched into short circuits much more often, and even repeatedly.
- 35 • superior dielectric behaviour after switching into a short circuit (no deformed contacts - points out of contacts).
- in combination with controlled disconnection, a smaller vacuum contact breaker can meet the same specifications.

Preferred embodiments are defined in the subclaims.

Hereafter, the invention shall be explained with reference to the following drawings:

Fig. 1 shows a schematic of the principles of a three-phase system according to the invention;

Fig. 2 shows an embodiment of the three-phase system according to the invention; and

Fig. 3 shows another embodiment of the three-phase system according to the invention.

Fig. 4a, 4b and 4c show possible points in time of contact touch of pole L1.

Figure 1 shows the principle of a three-phase system that comprises a three-phase power source e_{1t} , e_{2t} , e_{3t} and a load network 2 that can be connected to the phase terminals of the three-phase power source via a three-pole switch 1 with poles L1, L2 and L3. Moreover, the three-phase system includes a zero-crossing detector 3 which is connected between two phase terminals, for example phase terminals L1 and L2 of the three-phase power source e_{1t} , e_{2t} , e_{3t} . This detector determines the zero crossings of the voltage between the two abovementioned phase terminals and, based on a point in time of a zero crossing, controls the drive control circuit 4 that drives the poles L1, L2 and L3 of the three-pole switch 1. Notable here is that the use of a zero-crossing detector connected between the phase terminals L1 and L2 is preferred as a reference time detector. However, any detector can be used, such as a peak detector for example. Moreover, the detector can be connected between 1 phase and earth, or between 2 other phases. The important point is that there is a reference to the primary voltage. Measuring between 2 phases always gives a good and unambiguous result and is therefore preferred. For another reference point, the hereafter named times or angles of contact are, of course, used. The hereafter named times and angles are based on the zero-crossing detector being connected between the phases L1 and L2, therefore $U_{L1-L2}=0$.

The three-phase system can, for example, be a known three-phase medium voltage system (approximately 1-50 kV), which is equipped with vacuum switches as a three-pole switch. The invention is suitable for both load and power switches. In the three-phase system, in particular in the load network, an undetected short circuit can occur. While switching into such a short circuit, it is important to admit minimal energy in the arc during (unavoidable) pre-ignition to avoid possible welding together of the contacts. This can be achieved by switching with maximum asymmetry because in the relevant area of time of approx. 2 ms, the increase in current is still minimal. Moreover, pre-ignition will then be minimal, because the voltage is then zero, as is the case with an inductive load network. Since in the event of a short circuit the network will have an

inductive character, in this situation the same requirements as those noted above will apply.

A contradictory requirement to that given above is that for minimum operational power between the phases, asymmetric currents must be prevented as much as possible.

- 5 This requirement is considered less strict and therefore not set here. The network must in any case already be specified for a maximum asymmetric short circuit current, since short circuit can also occur in another way, whereby the full peak is reached.

Asymmetry is reached because poles L1, L2 and L3 are switched at controlled times. In order to assume one reference that satisfies all cases occurring (including therefore a floating supply with an already existing earth fault in the switch), a phase-phase voltage is considered, for example the voltage between the phase terminals L1 and L2. In particular, a zero-crossing detector 3 is used that in the given example has its input terminals connected to the phase terminals L1 and L2 and at its output gives a signal that represents a zero crossing. With this output signal of the zero-crossing
15 detector 3, the drive control circuit 4 is controlled, the drive control circuit 4 and the corresponding poles L1, L2 and L3 interacting such that the time of contact touch or the switching time of the first pole (L1) is after 185° increased by n times 180° after the zero crossing and that the times of contact touch of the second pole L2 and third pole L3 are 120° increased by n times 180° and 240° increased by n times 180° after the time
20 of contact touch of the first pole, where n is equal to zero or a whole number. Apart from the time difference given here between the times of contact touch of the second or third poles, the time difference can, if necessary and if desired, be increased further by n_1 times the frequency period for the second or n_2 times the frequency period for the third pole. Because the times are interrelated, n_2 in the chosen example should not be
25 smaller than n_1 . This can be different, of course, in a different network situation such as a different phase sequence. Furthermore, here also n_1 and n_2 can be zero or a whole number. In practice, n_1 and n_2 will be zero because in general it will as far as possible be attempted to approach synchronous switching of the three poles.

In the following, by way of example, a situation will be explained assuming a star
30 earthed network in which the best choice for the closing sequence of the poles L1, L2, L3 will be given as follows:

- contact touch of pole L1 after max. 2 ms + 185° with respect to the reference time, namely the zero crossing of the voltage between two phases, in this case $U_{L1-L2} = 0$, (optional: wait n_1 times the frequency period)
- 35 - switch the pole L2 with a delay of 120° with respect to the pole L1 (optional: wait n_2 times the frequency period)
- switch the pole L3 with a delay of 240° with respect to the pole L1 .

In this context, account is taken of a pre-ignition time of max. 2 ms and a bounce time of max. 2 ms. With a shorter pre-ignition time, contact touch can also take place at $x + 185^\circ$, where x is identical to the shorter ignition time.

The best choice for closure sequence for a floating network is identical to that of a star earthed network.

In table A, a comparison of controlled switching (including the effects of ± 1 ms and ± 2 ms spread in the mechanism) is given with respect to conventional simultaneous switching. A short-circuit current of 25 kA is assumed.

The most important criterion is the amount of energy during the arcing phase, expressed as $I^2.t$ or in the case of a constant arc voltage as $I.t$.

It is apparent from table A that the time constant τ of the network has hardly any influence on that criterion at least so long as realistic values for τ are taken. The standard IEC value ($\tau = 45$ ms) is therefore sufficient to calculate further. As "worst case" in table A, 2 ms pre-ignition + 2 ms bounce is assumed. Of course, shorter times have a more favourable effect here on (arc) energy (lower $I^2.t$ and $I.t$ values). The angle given gives the start of the pre-ignition and applies for 50 Hz. Two ms later, the contacts of pole L1 touch. Table A is given as an example for 50 Hz. For other frequencies, e.g. 60 Hz, the same behaviour is observed. With times remaining equal for spreads in the time control pre-ignition and bounce, other angles apply for 60 Hz. For two ms with 50 Hz this is 36° , but with 60 Hz it is 43.2° . With 60 Hz, different (somewhat higher) $I^2.t$ and $I.t$ values are also reached. The influence of controlled switching, however, is also still positive for 60 Hz.

Therefore, when account is taken of variations caused by the mechanical spread and by the accuracy of the time control of a maximum of 2 ms, the time of contact touch of the first pole L1 is between 185° and $185^\circ + 4$ ms. With this variation, controlled switching is still advantageous. With variations significantly larger than $+2$ ms or -2 ms, there is little point in controlled switching. With shorter pre-ignition times or shorter bounce times, the effect of controlled switching becomes even more favourable, because there is less (arc) energy generated between the contacts.

Fig. 4a gives the ideal time of contact touch for the first pole (L1). There is no mechanical spread, so account is only taken of the maximum pre-ignition time of 2 ms or 36 electrical degrees and the maximum bounce time of 2 ms or 36 electrical degrees. The point of contact is then at 221° .

When account is taken of a mechanical spread of a maximum $+2$ ms and -2 ms, the ideal point of contact will be displaced.

Fig. 4b gives the point of touch when the mechanism is switched on 2 ms too early, whereby the point of contact is at 185° .

Fig. 4c gives the point of touch when the mechanism is switched on 2 ms too late,

whereby the point of contact is at 257°.

In all three situations, however, the period within which the arc energy can manifest itself is limited to a maximum of 4 ms or 72 electrical degrees, and this “window” will shift forwards or backwards in time as a result of the mechanical spread.

5 For 50 Hz, the point of contact touch of pole L1 is therefore between 185° and 257° after the zero crossing ($U_{L1-L2} = 0$).

The point of contact touch for pole L2 for 50 Hz is between 84° and 156°, and for pole L3 with 50 Hz between 204° and 276°. As has been noted, these are points in time of contact touch of the poles L2 and L3 in relation to pole L1, and the points in time
10 can, if necessary, still be lengthened by a number of periods.

TABLE A

τ (ms)	45 (IEC)		32		106	
Ref. $U_{L1-L2} = 0$	$I^2t(KA)^2s$	$I.t(As)$	$I^2t(KA)^2s$	$I.t(As)$	$I^2t(KA)^2s$	$I.t(As)$
Conventional max. (95°)	2.3	83.3	2.2	82.5	2.4	84.6
Controlled ideal (185°)	<0.05	10.6	<0.05	10.6	<0.05	10.6
+1 ms (203°)	0.3	24.7	0.3	24.6	0.3	24.9
-1 ms (167°)	0.2	27.1	0.2	26.7	0.2	27.6
+2 ms (221°)	0.9	47.9	0.9	47.5	0.9	48.4
-2 ms (149°)	0.7	50.1	0.7	49.5	0.8	51.0

Influence
of
mechanic
al spread

Influence of controlled switching with 25 kA short-circuit

5

There are two possibilities for controlling the poles of the switch. Firstly, there is a drive with mechanical graduations at 120° (pole L2) and 240° (pole L3): so at 50 Hz this would correspond to 6.7 and 13.3 ms. The other possibility consists of 3 independent drives, each switching 1 pole.

10 Figure 2 shows a first embodiment with mechanical delay between the phases L1, L2 and L3.

A zero-crossing detector 3 detects the zero crossings of the voltage between the L1 and L2 phases. The output signal of the zero-crossing detector 3 is transmitted to the central processing unit 5 which determines from the zero-crossing signals, the times at
15 which the actuator drive control or buffer 6 is activated. This actuator drive control or buffer 6 controls actuator 7 which in turn switches poles L1, L2 and L3 of the three-pole switch 1. The contact touch of poles L1, L2 and L3 of the switch are influenced by mechanical delays V_1 , V_2 and V_3 , the delay periods of which also ensure that the poles L1, L2 and L3 are switched at the times mentioned above. V_1 governs the delay of L1,
20 V_2 the delay of L2, and V_3 the delay of L3. It is preferable to limit the delays to two, with one governing the delay between L1 and L2, and the other the delay between L2 and L3.

Figure 3 shows an embodiment with electronic delay between the phases. In this embodiment too, a zero-crossing detector 3 and a central processing unit 5 are used.
25 The central processing unit 5 has three outputs to which three actuator drive controls or buffers 6₁, 6₂ and 6₃ are connected, the outputs of this being connected to the inputs of the actuators 7₁, 7₂ and 7₃, which control poles L1, L2 and L3. The delay can be implemented electronically somewhere in the circuit from the central processing unit

up to and including the actuators 7_1 , 7_2 and 7_3 . V_1 governs the delay of L1, V_2 of L2, and V_3 of L3. The delays can be limited to two, with one governing the delay between L1 and L2, and the other the delay between L2 and L3.

- 5 Owing to the choices of the points of contact touch mentioned above, a maximum asymmetric short-circuit current will exist, with the result that the thermal load of the power switch is minimal. It is therefore possible without difficulty to switch on the short-circuit current even more often or to choose a smaller design. The maximum delay for the three poles is preferably always smaller than 1 period (20 ms at 50 Hz), and therefore of no importance to the user.

CLAIMS

1. Three-phase system comprising a three-phase power source, a three-pole switch, through which the phase terminals of the three-phase power source can be connected to a load network, a reference time detector for determining a reference point in time and a drive control circuit for driving the poles of the switch such that the poles of the three-pole switch are switched at controlled times at different intervals with respect to the reference time, characterised in that the time of the contact touch of the first pole (L1) is between 185° and 257° increased by n times 180° after the zero crossing of the voltage between the first and second pole (L1, L2) and in that the times of contact touch of the second pole (L2) and the third pole (L3) are respectively at n_1 times the frequency period increased by 120° and increased by n times 180° , and at n_2 times the frequency period increased by 240° and increased by n times 180° after the time of contact touch of the first pole (L1), where n , n_1 and n_2 are zero or a whole number.
2. Three-phase system according to claim 1, characterized in that the time of contact touch of the first pole (L1) is at $2\text{ ms} + 185^\circ$ increased by n times 180° after the zero crossing of the voltage between the first and second pole (L1, L2).
3. Three-phase system according to claim 1, but characterized in that the time of contact touch of the first pole (L1) is in the range 185° to $185^\circ + 4\text{ ms}$ increased by n times 180° after the zero crossing of the voltage between the first and second pole (L1, L2) and in that the times of contact touch of the second pole (L2) and third pole (L3) are respectively in the range of n_1 times the frequency period increased by $120^\circ - 2\text{ ms}$ to n_1 times the frequency period increased by $120^\circ + 2\text{ ms}$ and increased by n times 180° and in the range of n_2 times the frequency period increased by $240^\circ - 2\text{ ms}$ to n_2 times the frequency period increased by $240^\circ + 2\text{ ms}$ and increased by n times 180° after the time of contact touch of the first pole (L1), where n , n_1 and n_2 are zero or a whole number.
4. Three-phase system according to claim 1, 2 or 3, characterized in that the reference time detector is a zero-crossing detector that is connected between the two phases (L1, L2).
5. Three-phase system according to one of the previous claims, characterized in that the poles of the three-pole switch are provided with mechanical delays and the values of the delays correspond to the time intervals associated with the switching times of the poles.
6. Three-phase system according to one of the previous claims, characterized in that the drive control circuit controlling the switching of the poles of the three-pole switch is provided with an electronic delay and the values of the delays correspond to time intervals associated with the switching times of the poles.

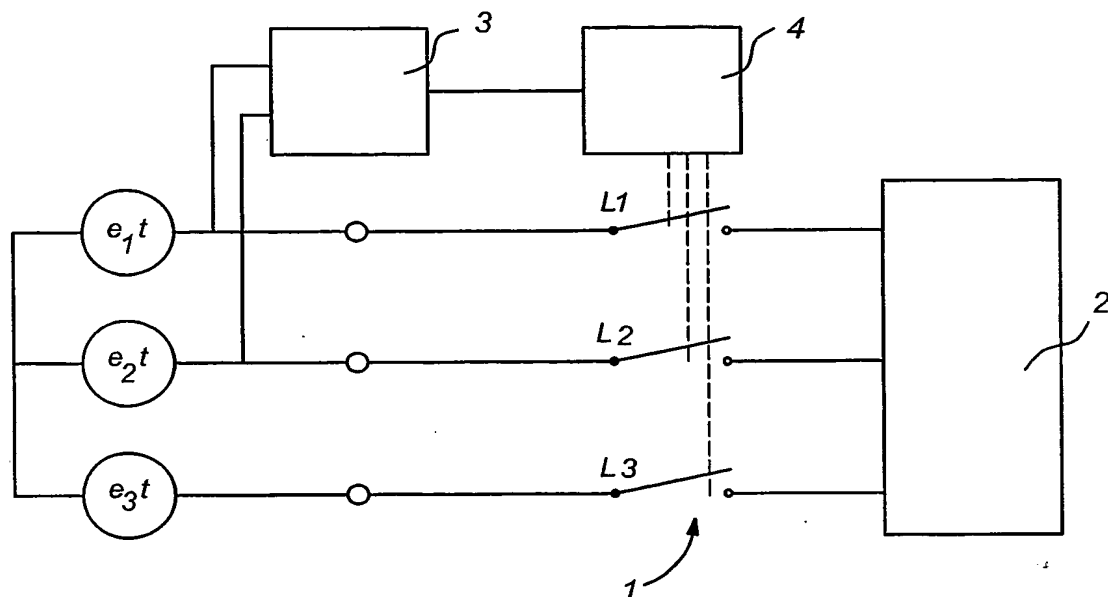
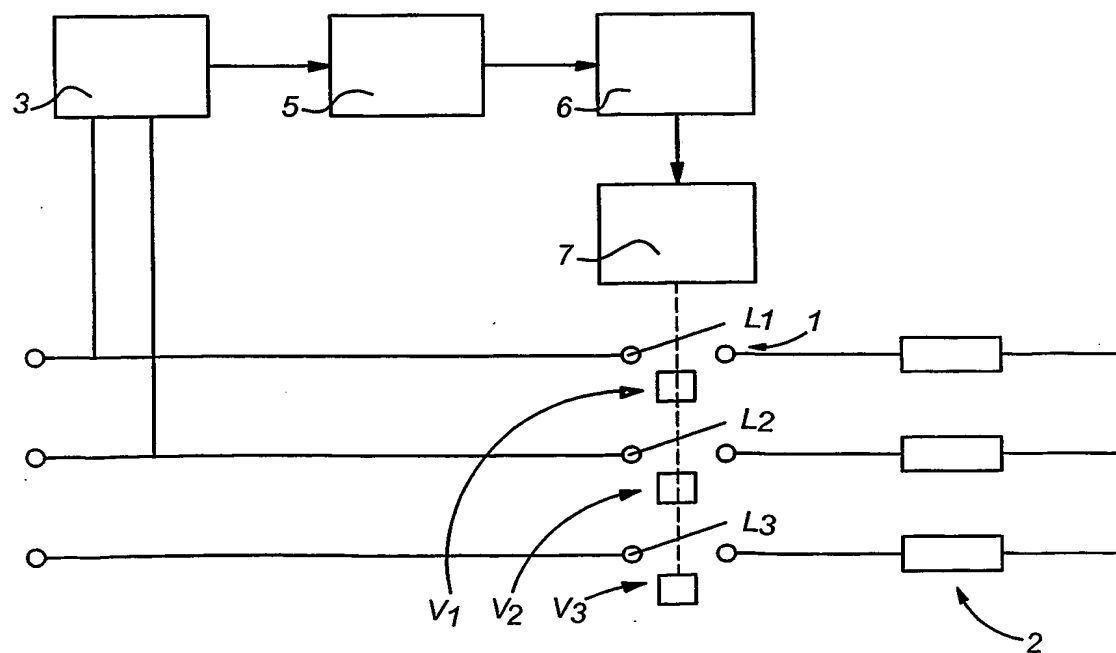
Fig 1*Fig 2*

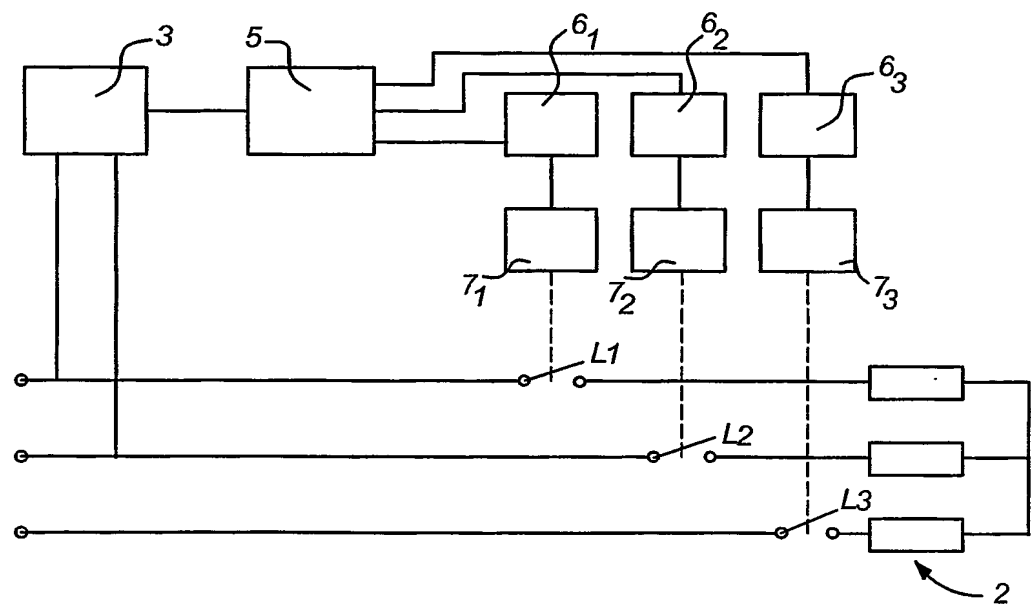
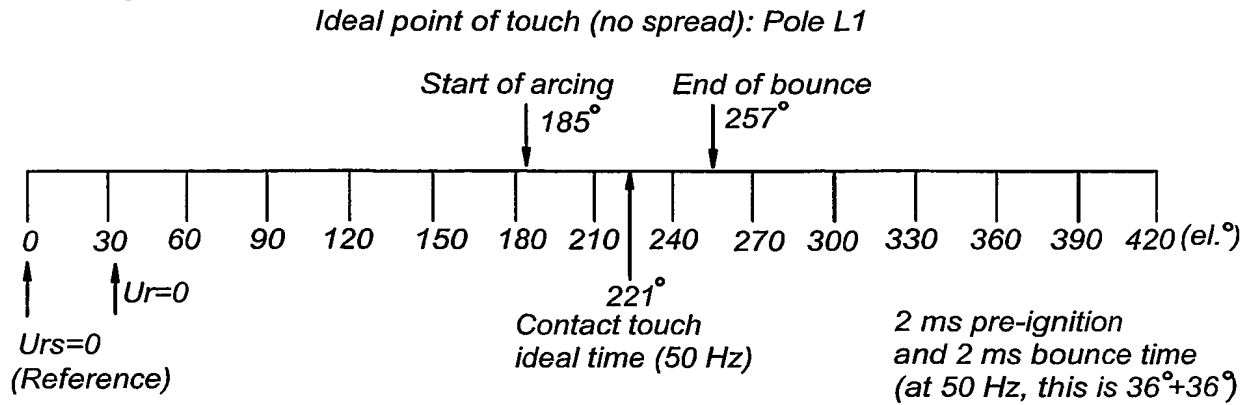
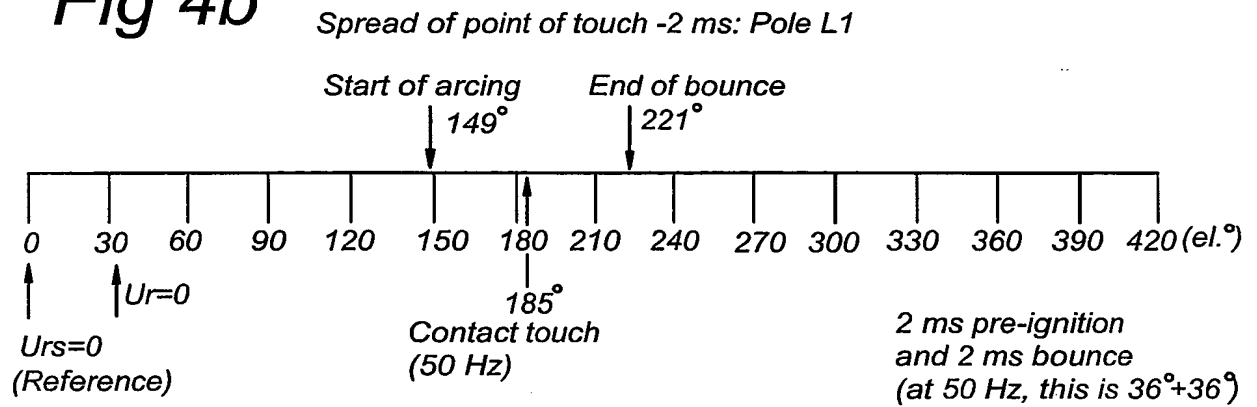
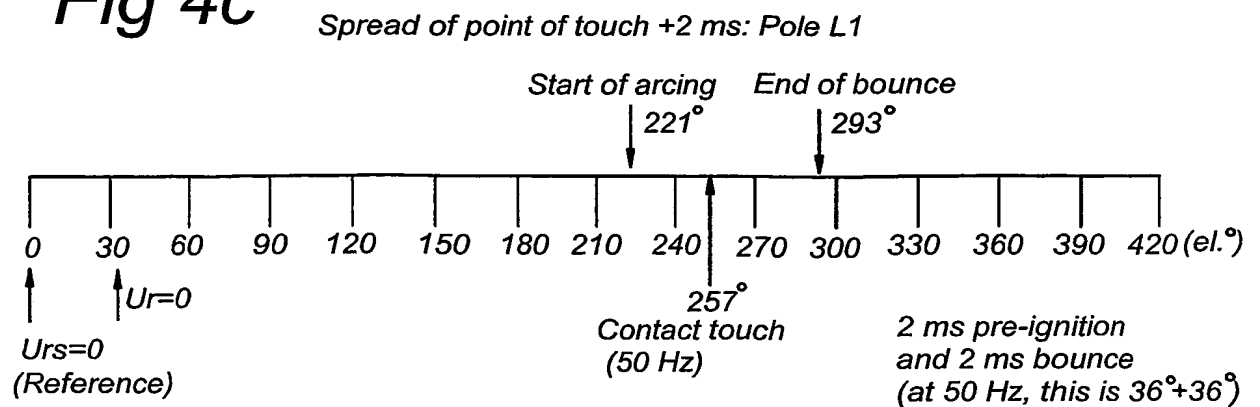
Fig 3

Fig 4a**Fig 4b****Fig 4c**

INTERNATIONAL SEARCH REPORT

PCT/NL 02/00588

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H01H9/56

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHEDMinimum documentation searched (classification system followed by classification symbols)
IPC 7 H01H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)
EPO-Internal**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 963 021 A (BERKEBILE LEE E ET AL) 5 October 1999 (1999-10-05) column 2, line 65 -column 3, line 35 ---	1-6
A	EP 0 338 374 A (ASEA BROWN BOVERI) 25 October 1989 (1989-10-25) abstract ---	1
A	DE 41 05 698 A (ELEKTRO APP WERKE VEB) 27 August 1992 (1992-08-27) cited in the application abstract -----	1

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the International filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the International filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

11 December 2002

Date of mailing of the international search report

23/12/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Libberecht, L

INTERNATIONAL SEARCH REPORT

PCT/NL 02/00588

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5963021	A	05-10-1999	NONE	
EP 0338374	A	25-10-1989	DE 3812734 A1 EP 0338374 A2	26-10-1989 25-10-1989
DE 4105698	A	27-08-1992	DE 4105698 A1	27-08-1992

Form PCT/ISA/210 (patent family annex) (July 1992)

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)